



Unlimited possibilities!


GANSER
STAIR LIFTS




For curves with constant slope

- the upper stainless steel tube can be used as handrail
- minimal construction lowness of 280 mm at parking position
- shapely construction - free choice of RAL-color or stainless steel design
- major security against vandalism at parking position
- fixation on the wall, single stilts or steel construction
- extensive control device, easy handling
- gentle in start, slower in curves
- platform size 1000 x 800 mm or construction for the staircase suitable

Standard:
automatic operation platform and security bar,
therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio,
emergency-call, folding seat, additional 3rd ramp,
emergency electrical power supply, outside useable,
handling on coil cable.

Special constructions on request.

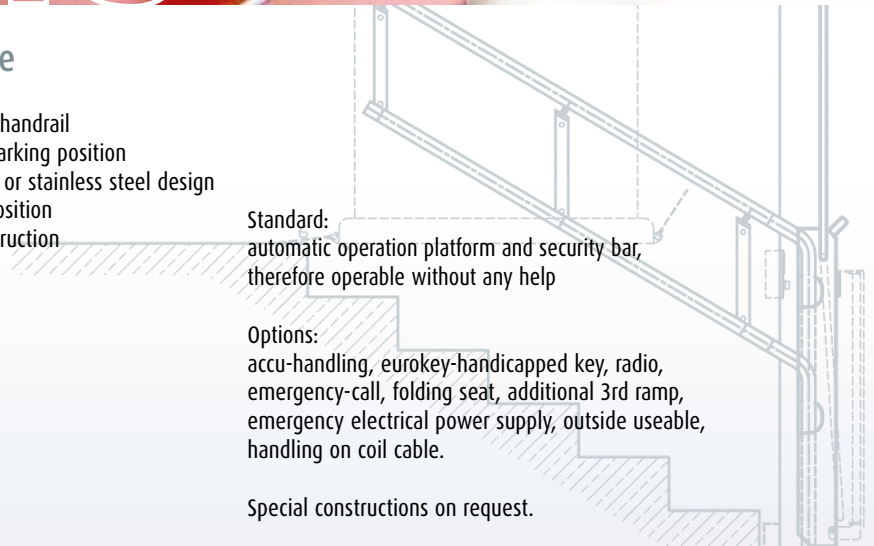


Technical details GTL 15

Max. capacity:	bis 300 kg
Speed:	max. 0,15 m/sek. (reduce in curves)
Electronic device:	230 V / 50 Hz.



GANSER
TREPPENLIFTE

GTL 20

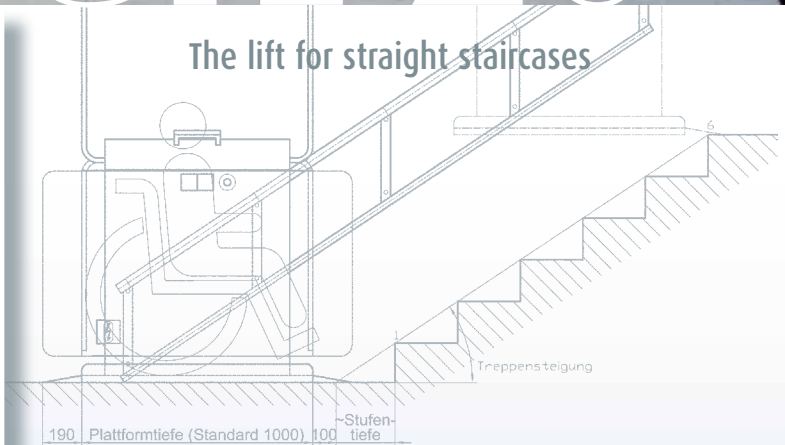

Standard:
automatic operation platform and security bar,
therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio,
emergency-call, folding seat, additional 3rd ramp,
emergency electrical power supply, outside useable,
handling on coil cable.

Special constructions on request.



Technical details GTL 20

Min. construction lowness of 225 mm

Max. capacity: bis 300 kg
Speed: max. 0,15 m/sek.
Electronic device: 230 V / 50 Hz.

GTL 30



The special lift for drives in different angles of inclination, curves and horizontal drives

- the upper stainless steel tube can also be used as handrail
- minimal construction lowness of 350 mm at parking position
- shapely construction - free choice of RAL-color or stainless steel design
- major security against vandalism at parking position
- gentle in start, slower in curves and change angle of inclination
- difficult lane runs possible
- platform size 1000 x 800 mm or suitable construction for the staircase

Standard:
automatic operation platform and security bar, therefore operable without any help

Options:
accu-handling, eurokey-handicapped key, radio, emergency-call, folding seat, additional 3rd ramp, emergency electrical power supply, outside useable, handling on coil cable.

Special constructions on request.

Technical details GTL 30

Max. capacity: bis 300 kg
Speed: max. 0,15 m/sek.
Electronic device: 230 V / 50 Hz.



GANSER
STAIR LIFTS

A-4171 St. Peter/Wbg., Markt 26
Tel. +43 (0) 72 82 / 80 71 • Fax +43 (0) 72 82 / 80 71-22
www.ganserlift.at • info@ganserlift.at

